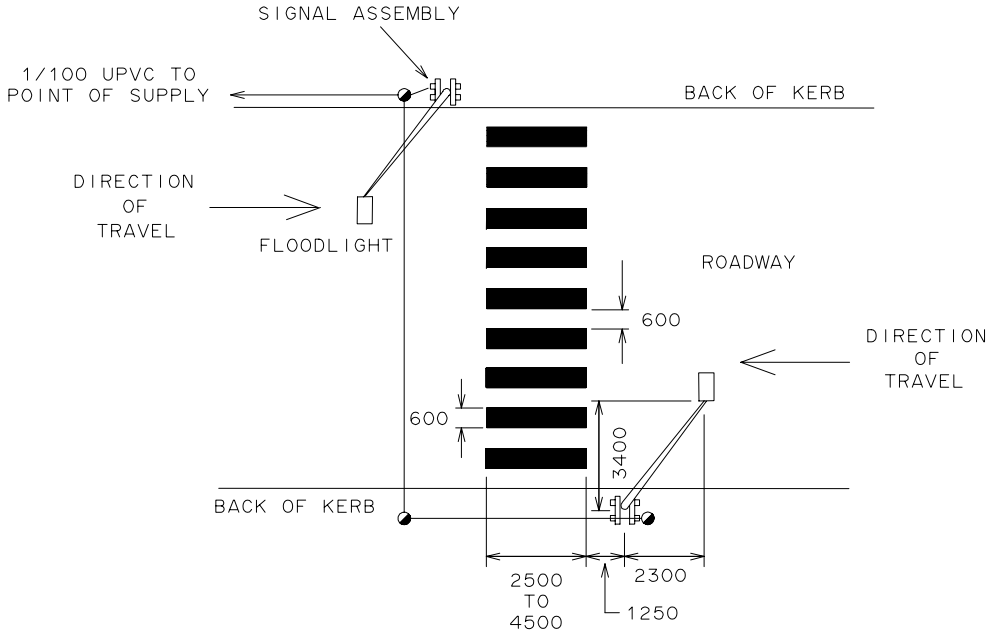

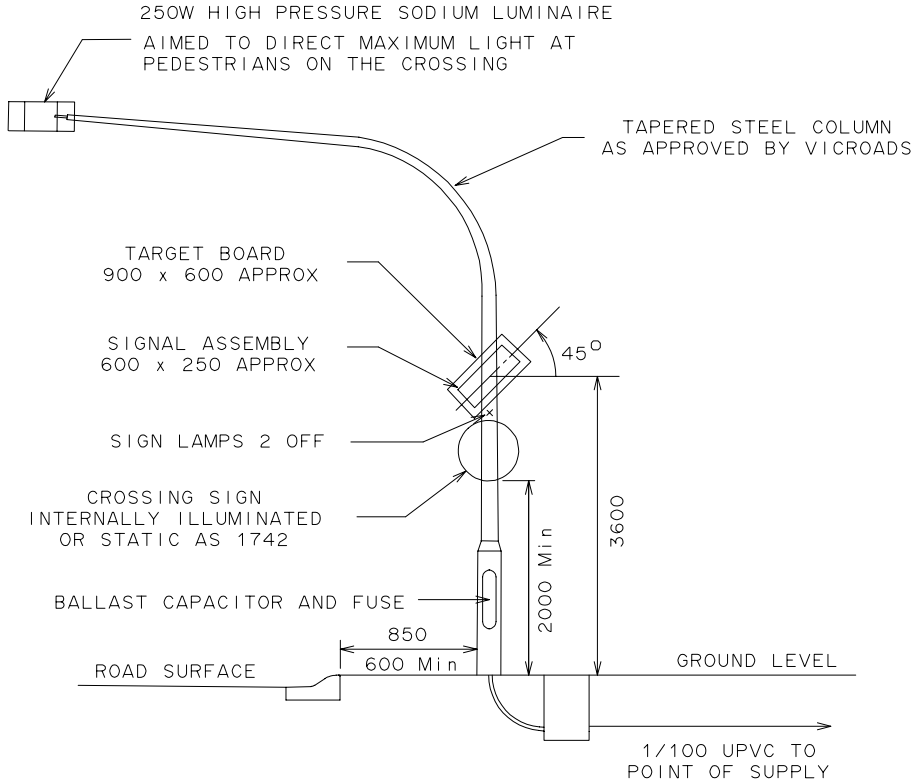

NOTES

1. SIGNAL SHALL BE A 2 ASPECT 200mm DIAMETER YELLOW LANTERN
2. EACH PAIR OF FLASHING YELLOW LIGHTS MUST BE CAPABLE OF BEING AIMED SEPARATELY FROM ANY OTHER PAIR.
3. ALL CONDUITS USED ARE TO COMPLY WITH AS 2053.
4. UNLESS OTHERWISE DIRECTED OVERHEAD FLOODLIGHTING SHALL BE PROVIDED BY OTHERS.

NOTES

1. THE MINIMUM CLEARANCE FROM THE PAVEMENT SHALL BE 5500 MEASURED AT A DISTANCE OF 1100 FROM THE CENTRE OF THE COLUMN AND ALLOWING A KERB HEIGHT OF 150.
2. FOUNDATION SHALL BE AS SHOWN IN TC-1201

AMEND.	Appd.	DATE	AMENDMENTS
E			
D			
C			
B			
A			

GENERAL NOTES / CROSS REFERENCES
UNSPECIFIED DIMENSIONS ARE IN mm.

vicroads
TRAFFIC AND ROAD USE MANAGEMENT DEPARTMENT

TRAFFIC SYSTEM OPERATION

STANDARD DRAWING FOR TRAFFIC SIGNALS

TYPICAL LAYOUT
FLASHING PEDESTRIAN CROSSING

CHECKED	DATE	APPROVED	DATE	SPEC. REF.	SHEET No.	DRAWING No.	AMENDMENT
L. FRENCH	13.10.00	B. HEARN T.S.O. MANAGER	13.10.00			TC-1104	