
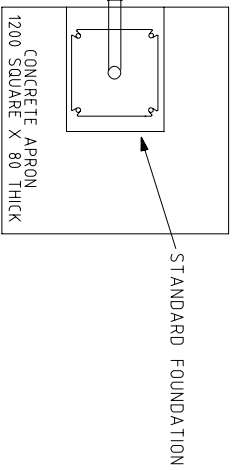
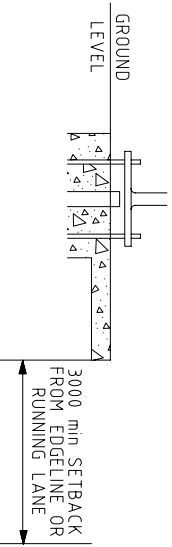


SECTION B-B
STANDARD FOUNDATION (URBAN)

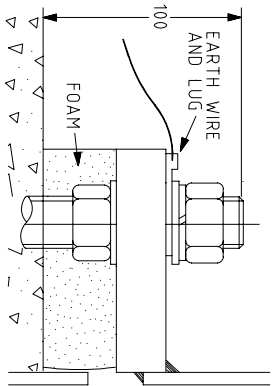

COURTESY APRON (RURAL)

- MATERIALS REQUIRED PER INSTALLATION**
- RAGBOLT ASSEMBLY - M24 COMMERCIAL GRADE
 - HEAVY DUTY WHITE 50mm dia CONDUIT AND JOINTING CEMENT
 - ELECTRODE AND CLAMP (OR EARTH PLATE) WITH EARTH WIRE AND LUG
 - PHONE AND POST ASSEMBLY

GENERAL NOTES

1. THE THREADED PORTION OF EACH RAGBOLT TO BE COATED WITH GRAPHITE GREASE OR SIMILAR BEFORE ASSEMBLY.
2. A 144m EARTH ELECTRODE WITH CLAMP SHALL BE INSTALLED IN THE FOUNDATION ; ALTERNATELY, AN EARTH PLATE SHALL BE INSTALLED BENEATH THE FOUNDATION AND COVERED WITH A MINIMUM OF 25mm OF SOIL BEFORE THE CONCRETE IS POURED. CONNECTION TO THE NEAREST RAGBOLT SHALL BE BY MEANS OF WIRE (6 mm²) AND LUG.

450 SQUARE FOUNDATION
(500 dia MAY BE SUBSTITUTED)
CONCRETE STRENGTH SHALL
BE 25Mpa AT 28 DAYS

GENERAL NOTES / CROSS REFERENCES

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN
2. THIS DRAWING IS NOT TO SCALE

STANDARD DRAWING

THIS DRAWING SUPERSEDES NO. 417196

HELP PHONE - INSTALLATION DETAILS

E									
D									
C									
B									
A									
AMEND.	Appd.	DATE	AMENDMENTS						
				TRAFFIC AND ROAD USE MANAGEMENT DEPARTMENT					
				TRAFFIC SYSTEM OPERATION					
		CHECKED	DATE	APPROVED	DATE	SPEC. REF.	SHEET NO.	DRAWING NO.	AMENDMENT
		J. RANDALL	21/12/95	B. HEARN	21/12/95			TC-2023	
				T.S.O. MANAGER					

