


NOTES:

1. LOOPS ARE DESIGNED TO LIE DOWNHILL FROM LEAD-INS TO MINIMISE WATER POOLING
2. LOOPS MUST BE PLACED IN THE CENTRE OF THE LANE

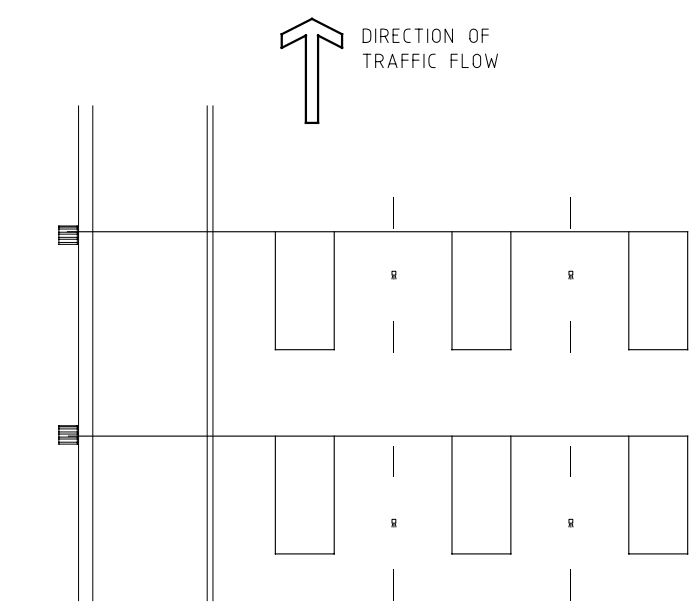

ASSOCIATED DRAWINGS  
 TC-1320 DETECTOR PIT - INSTALLATION DETAILS  
 TC-2032 DETECTOR LOOP - INSTALLATION DETAILS

AMEND.	APPD	DATE	AMENDMENT
C	D.S.	5/9/2005	LANE LINES MODIFIED, CENTRE LINES DELETED.
B	S.B.	29/03/05	STD LOOP PATTERN FOR NORMAL AND OPEN GRADE COURSE
A	KW	6/2/2004	NAME CHANGE TO FREEWAY DATA STATION (FORMERLY ID)

GENERAL NOTES/CROSS REFERENCES  
 UNSPECIFIED DIMENSIONS ARE IN mm

TRANSPORT SYSTEMS OPERATIONS  
 60 DENMARK STREET KEW, VICTORIA, 3101  
 PHONE (03) 9854 2111 FAX (03) 9854 2319

CHECKED J.RANDALL 21/12/95  
 APPROVED B.HEARN 21/12/95  
 SCALE OF METRES  
 HOR 0  
 VER 0

STANDARD DRAWING				
LOOP PATTERN FREEWAY DATA STATION				
FILE NO.	SPEC. REF.	SHEET NO.	DRAWING NO.	AMEND.
	TCS 054		TC-2033	C