


SECTION A-A

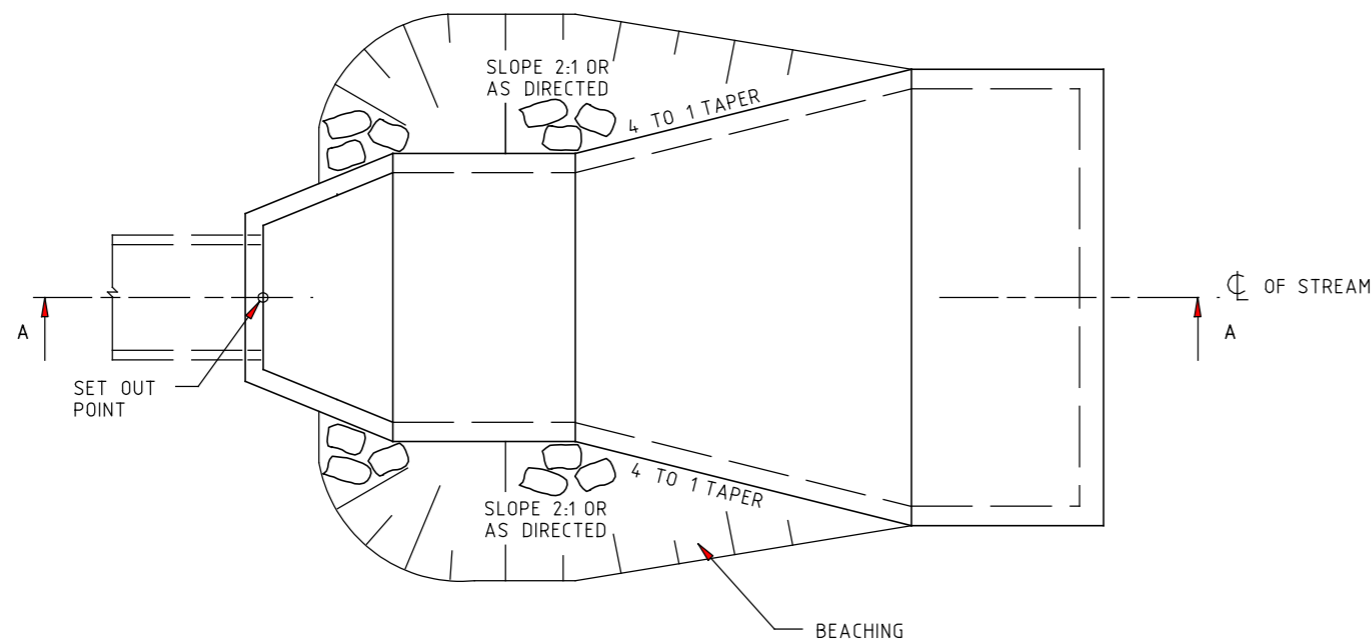

PLAN

NOTES:

1. EXTENT AND SLOPE OF APRON AND BEACHING TO BE DETERMINED PRIOR TO CONSTRUCTION AS DIRECTED BY THE SUPERINTENDENT'S REPRESENTATIVE.
2. REINFORCEMENT SHALL BE CONTINUOUS BETWEEN WALLS AND FLOOR WITH A MINIMUM LAP OF 300. REINFORCEMENT FABRIC SHALL COMPLY WITH AS 1304/1991.
3. CONCRETE SHALL BE NORMAL-CLASS N32 STANDARD STRENGTH GRADE OR HIGHER COMPLYING WITH THE REQUIREMENTS OF AS 1379. EXPOSURE CLASSIFICATIONS UP TO AND INCLUDING B1.

E				GENERAL NOTES / CROSS REFERENCES 1. ALL DIMENSIONS ARE IN MILLIMETRES. 2. END AND WINGWALL DETAILS SD 1801 TO SD 1981 3. CULVERT INLET AND OUTLET STRUCTURES - SELECTION GUIDE SD 1700	 PRINCIPAL ROAD DESIGN ENGINEER'S DEPARTMENT	STANDARD DRAWING						
D						DROP INLET						
C							TYPE 1					
B	J.C.	1.2.98	AMENDMENT TO NOTE 3, CONCRETE STRENGTH GRADES.				APPROVED	DATE	SPEC. REF. No.	SHEET No.	DRAWING No.	AMENDMENT
A	J.C.	1.2.95	NOTES 2, 3. GENERAL NOTES 1, 2 & 3				<i>J. Cunningham</i>	12.95			SD 1701	B
AMEND.	Appd.	Date	AMENDMENTS		PRINCIPAL RD ENGINEER							