




ISSUE	APPROVED BY	DATE	AMENDMENT
F	D.CASSAR	01/17	MODIFIED M6 KERB ADDED

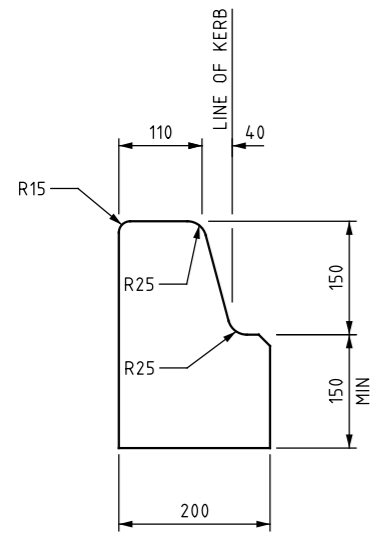


B1

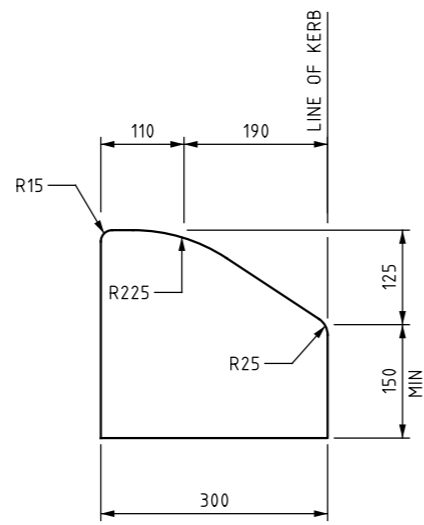


SM1

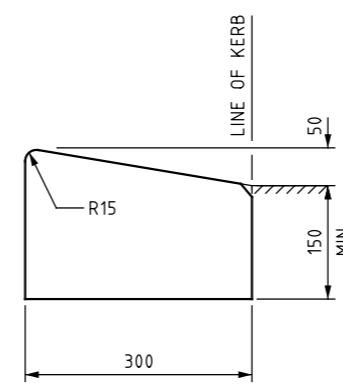


M1

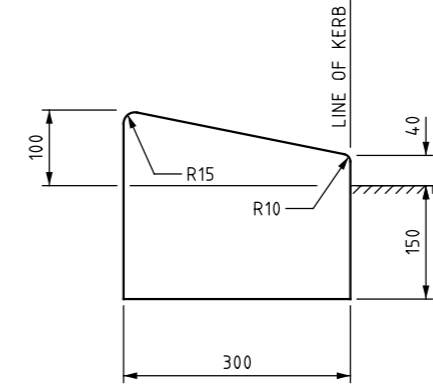


M4

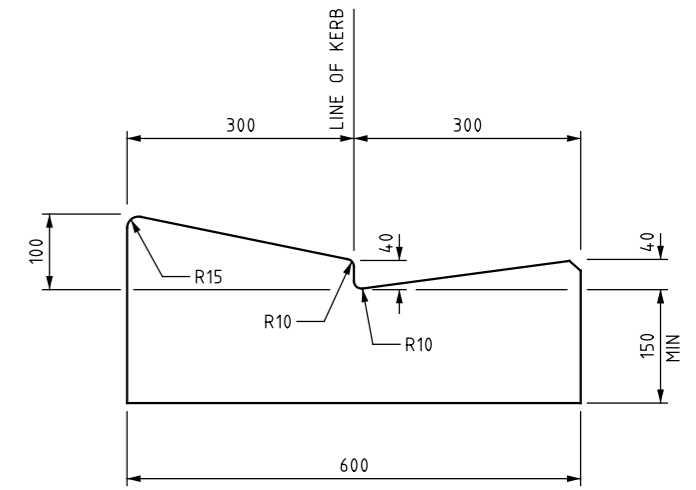


M5

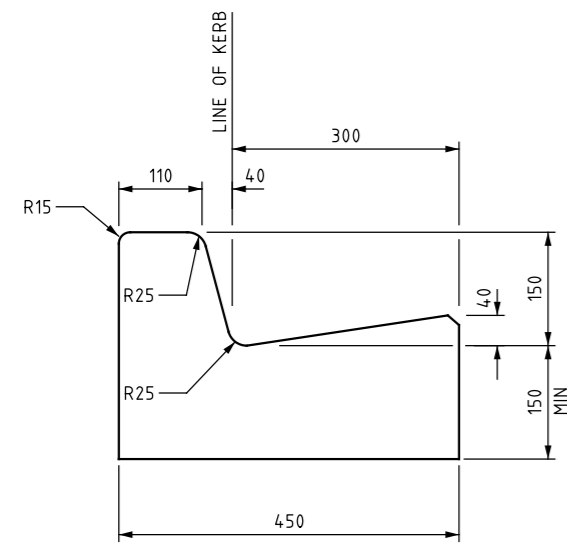


B2

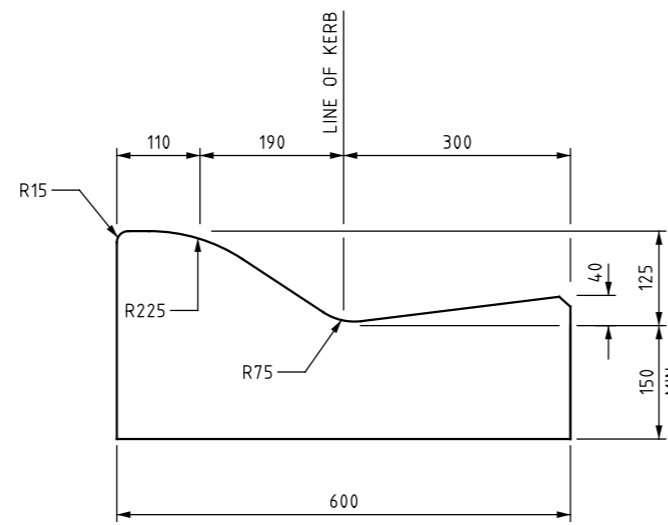


SM2

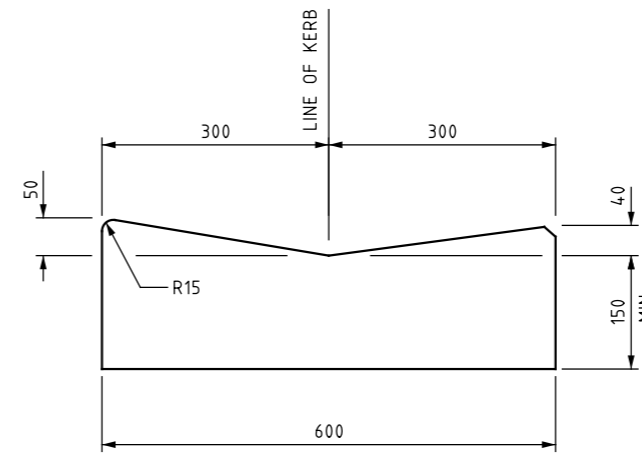


M2

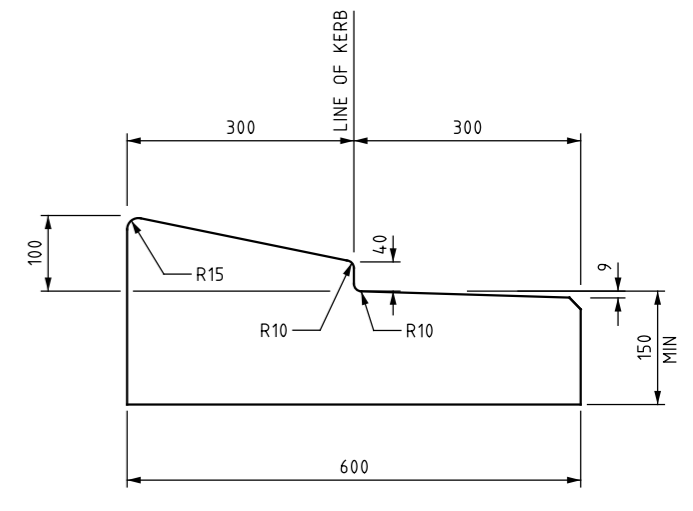


M6

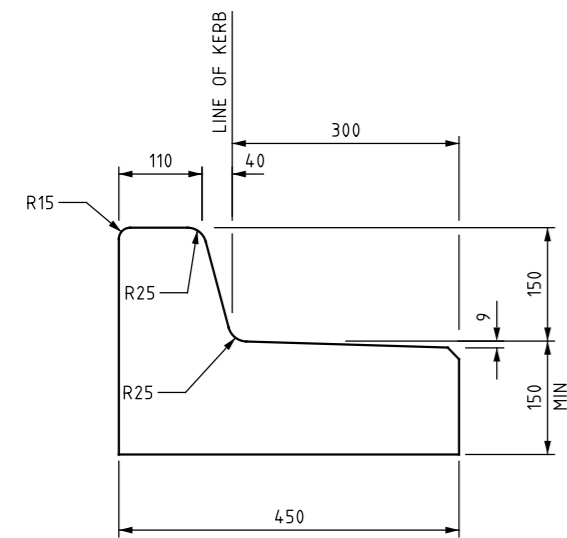


B3

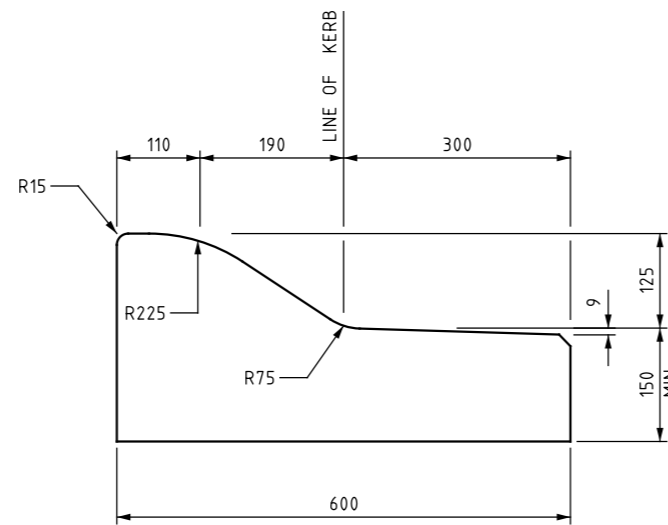

SM3

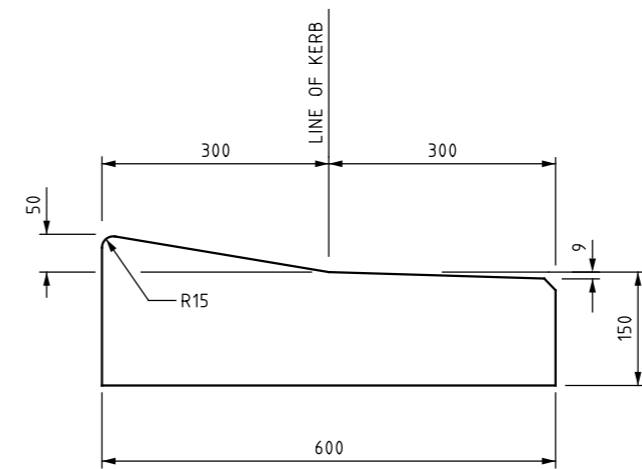

M3

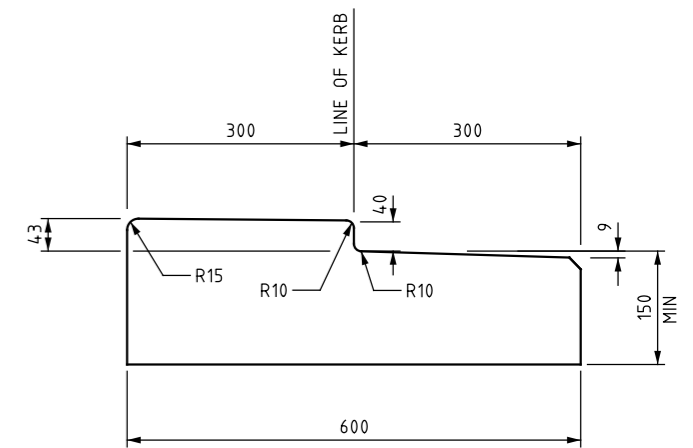

MODIFIED M6

BARRIER KERBS

SEMI-MOUNTABLE KERBS

MOUNTABLE KERBS

- REFERENCES AND NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES
 2. CHAMFERS ARE 15x15 UNLESS SHOWN OTHERWISE
 3. CONCRETE SHALL BE NORMAL - CLASS N25 STANDARD STRENGTH GRADE COMPLYING WITH THE REQUIREMENTS OF AS 1379
 4. TRANSITIONS BETWEEN KERB TYPES SHOULD BE DEVELOPED OVER ONE METRE (MIN)
 5. REFER TO AGRD PART 3 SECTION 4.6.4 AND VRS SECTION 4.6.4 FOR THE RECOMMENDED USE OF KERBS AND CHANNELS
 6. REFER TO RDN 03-01 THE USE OF HIGH PROFILE BARRIER KERB (HPBK)

AS 1379 SPECIFICATION AND SUPPLY OF CONCRETE
AS 2876 CONCRETE KERBS AND CHANNELS (GUTTERS)
MANUALLY OR MACHINE PLACED
AS 3600 CONCRETE STRUCTURES
VR SPECIFICATION 703 GENERAL CONCRETE PAVING



KERBS SD2001
BARRIER, SEMI-MOUNTABLE AND MOUNTABLE

0 100 200	APPROVED DANIEL CASSAR (PRDE) 13-8-12	SD NO. SD2001	ISSUE F
-----------	--	------------------	------------

VICROADS DRAWING NO 720251