


BATTER EQUAL TO OR LESS THAN 3:1  
 ONE PASS OF A GRADER BLADE  
 TO FLATTEN THE VERTEX OF THE TWO SURFACES

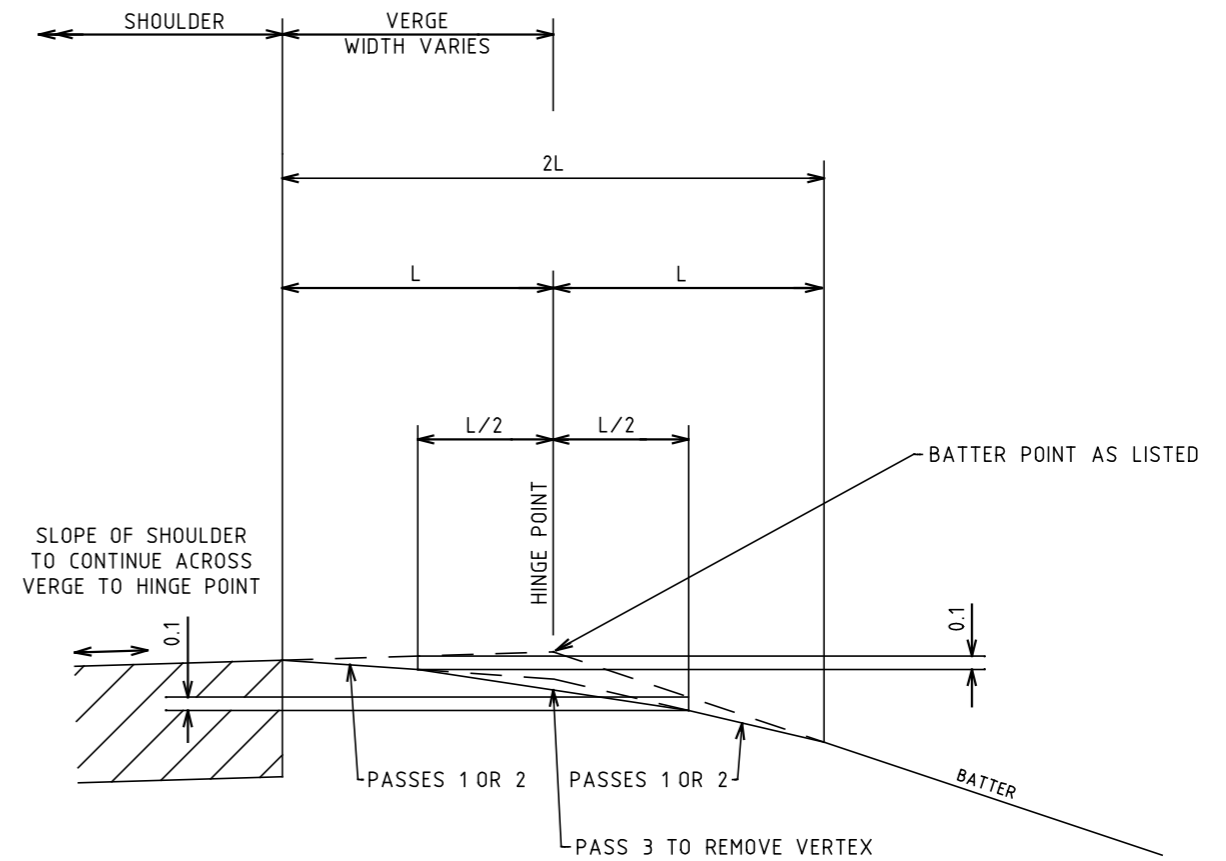

BATTER EQUAL TO OR GREATER THAN 3:1  
 THREE PASSES OF A GRADER BLADE  
 TO FLATTEN THE VERTEX OF THE TWO SURFACES

NOTES:


1. THE MINIMUM VERGE WIDTHS, L, ARE SHOWN IN TABLE 3.6.4.2 OF R.D.G. PART 3, FOR THE CHANGE IN LATERAL GRADE BETWEEN THE SHOULDER AND THE FILL BATTER.

|       |       |      |           |
|-------|-------|------|-----------|
| E     |       |      |           |
| D     |       |      |           |
| C     |       |      |           |
| B     |       |      |           |
| A     |       |      |           |
| ISSUE | APP'D | DATE | AMENDMENT |

GENERAL NOTES

1. DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE
2. VERGE ROUNDING NOT REQUIRED - (1) IN CUT  
(2) BEHIND K&C IN CUT OR FILL  
(3) ON LOCAL ROADS  
(4) BEHIND SAFETY BARRIER
3. BATTERS SHALL BE ROUNDED PRIOR TO TOP SOILING

DESIGNED  
 PRINCIPAL ROAD  
 DESIGN ENGINEER

APPROVED  
  
 Date 1/11/01

CATALOG: PRED  
 PROJECT: sddgnnew



COMPUTER FILE  
 sd-4551.dgn

SCALE  
 OF  
 METRES

HOR NOT TO SCALE  
 VER

FILE NO.

STANDARD DRAWING  
 CONSTRUCTION OF  
 VERGE ROUNDING

CONTRACT NO.

SHEET NO.

DRAWING NO.  
 SD 4551

ISSUE